

# 600V PVC Cabtyre Cables




RoHS

Application : Power cable with plug and extension cord for mobile electric appliances operated at 600 V AC Max.

Features : Highly flexible and processible.

## 《VCT》 PVC Cabtyre Round Cable (normal)

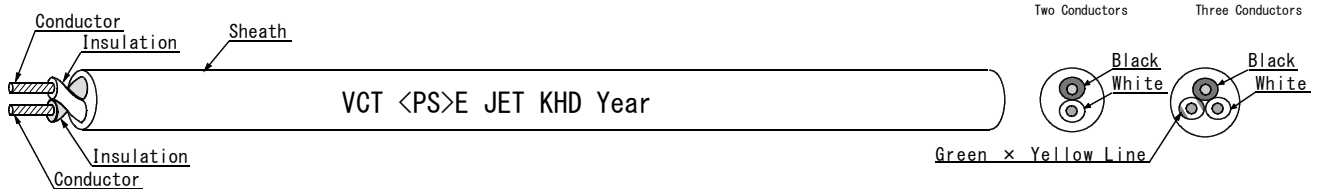

## 《VCT》 PVC Cabtyre Round Cable (Kevilon soft)



Type	Standards	Compliant	Rated Voltage	Rated Temp.	Burning Characteristics	Insulation Material	Sheath Material
VCT	<PS>E	RoHS	600V	60°C	60° angle from the horizontal position flame test	Lead-free PVC	Lead-free PVC
Kevilon soft VCT							Kevilon soft Lead-free PVC

Type	Num. of Cond.	Conductor		Insulation		Sheath		Conductor Resistance (20°C) Ω/km Max.	Mass Approx. kg/km	Nom. Length m
		Size mm <sup>2</sup>	Strands/Dia. Num. /mm	Nom. Dia. mm	Nom. Thick. mm	Nom. Thick. mm	Nom. Dia. mm			
VCT	2	0.75	30/0.18 A	1.1	0.8	1.7	8.8	25.10	101	200
		1.25	50/0.18 A	1.5	0.8	1.7	9.6	15.10	125	200
		2.0	37/0.26 A	1.8	0.8	1.8	10.4	9.79	154	100
Kevilon soft VCT	3	0.75	30/0.18 A	1.1	0.8	1.7	9.2	25.10	115	150
		1.25	50/0.18 A	1.5	0.8	1.7	10.1	15.10	145	150
		2.0	37/0.26 A	1.8	0.8	1.8	11.0	9.79	184	100